



MODEL SERIES



AMPERES

VOLTS

TYPICAL BOOSTER PUMP CONTROL WIRING DIAGRAM

INDUSTRIAL CONTROL-
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT


CAT.NO. BPC-M060-112C 120/240VAC 1PH 3 WIRE 60 AMPS

SHORT CIRCUIT RATING: 10,000 RMS SYMMETRICAL AMPS @ 240 VAC MAX.
*CIRCUIT BREAKERS 125 AMPS OR LESS: WESTINGHOUSE/BRYANT BR, BD, BQ, GFCB.

- REPLACEMENT BREAKERS MUST BE SAME TYPE AND RATING.
- *AUTOMATIC TRIP IS INDICATED BY HANDLE POSITION MIDWAY BETWEEN (ON) AND (OFF). TO RESTORE POWER MOVE HANDLE TO (OFF), THEN (ON).
- *PANELBOARD IS SUITABLE FOR USE WITH 60/75 DEGREE C COPPER OR ALUMINUM WIRE.
- *THE MAXIMUM SIZE CIRCUIT BREAKER TO BE INSTALLED ON THE LEFT SIDE OF THE PANELBOARD IS 90 AMPS WHEN COPPER WIRE IS USED AND 70 AMPS WHEN ALUMINUM WIRE IS USED.
- *PANELBOARD IS LIMITED TO A MAXIMUM OF 13 INSTALLED CIRCUITS THAT UTILIZE A NEUTRAL CONNECTION, EITHER SINGLE POLE, MULTIPOLE, OR A COMBINATION OF EACH.
- *SHIPPING TENDS TO LOOSEN ELECTRICAL CONNECTIONS - TIGHTEN ALL CONNECTIONS BEFORE ENERGIZING UNIT.



"A" AND "B" INDICATE CLASS CTL DUPLEX AND QUADPLEX CIRCUIT BREAKER POSITIONS.

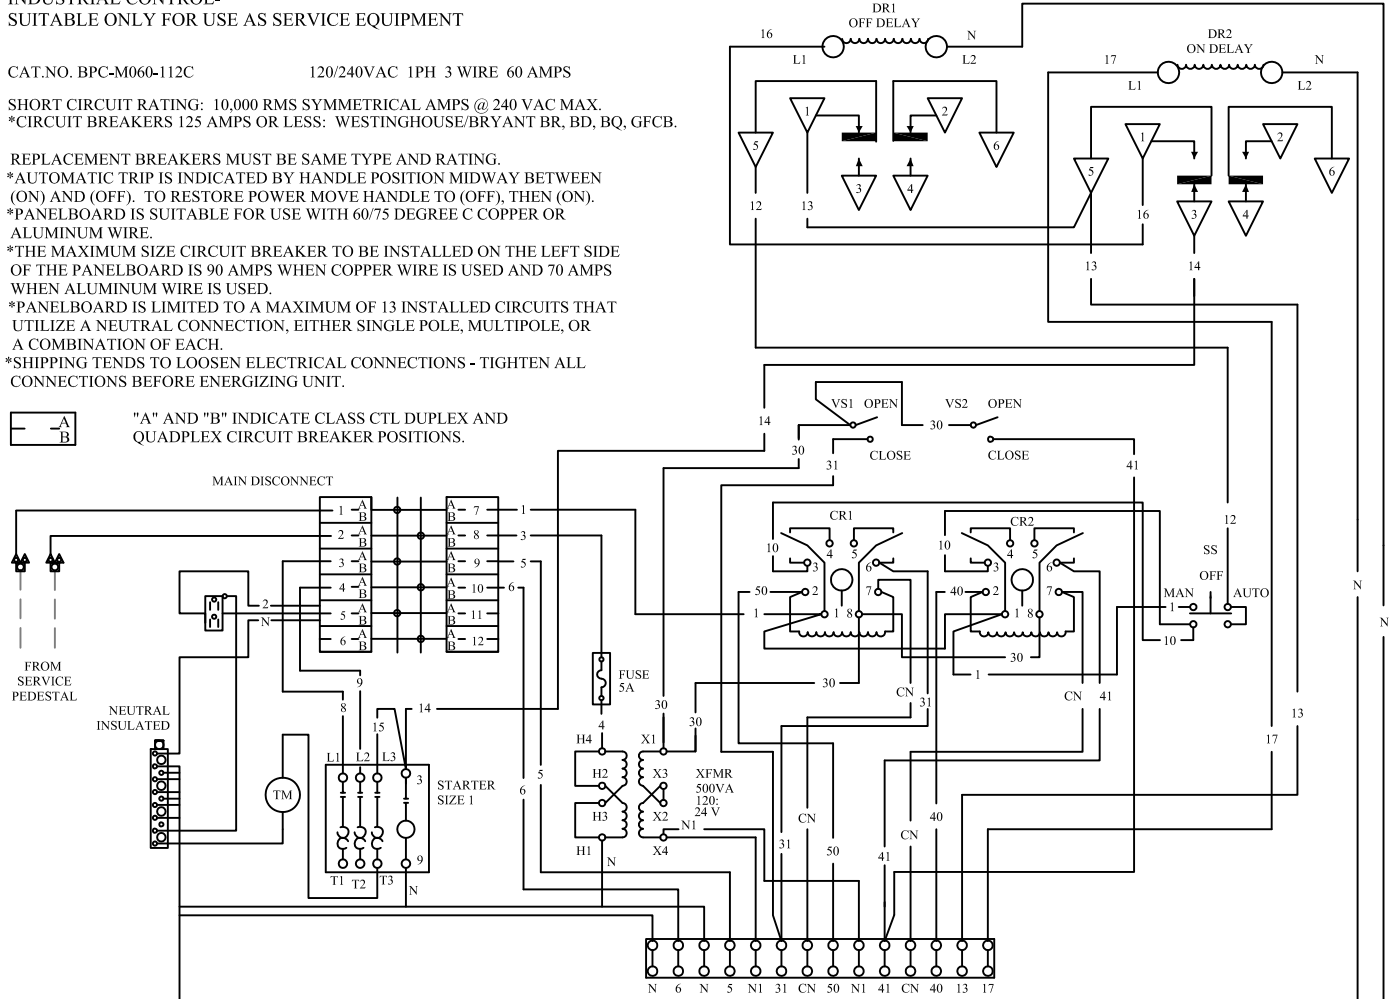

FACTORY MODIFICATIONS AVAILABLE TO MEET YOUR JOB SPECIFICATIONS-
CONTACT FACTORY REPRESENTATIVE FOR DETAILS