


USPD-KDOT

MODEL SERIES



0 - 200 AMPERES 0 - 600 VOLTS

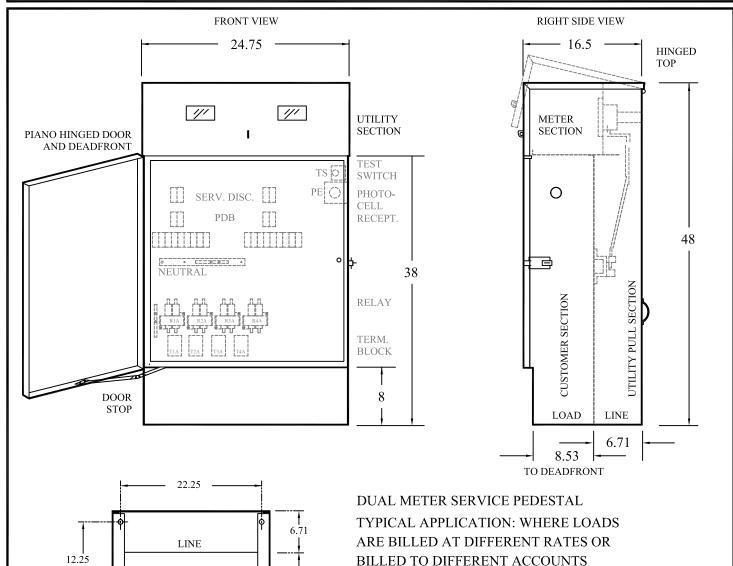

STANDARD FEATURES

(2) METER SOCKETS 4 JAW AND 5 JAW. UTILITY LANDING LUGS 250KCMIL

STANDARD VOLTAGE 120/240VAC 1 PHASE 3 WIRE CIRCUIT BREAKER INTERIOR COPPER BUS 12 CIRCUIT

LIGHTENING ARRESTOR AVAILABLE 650 VAC.

MERCURY RELAY AND TERMINAL BLOCK SIZED FOR EACH LIGHTING CIRCUIT AS REQUIRED PER PROJECT SPECIFICATIONS DOOR STOP TO PREVENT CUSTOMER DOOR SWINGING CLOSED

PHOTOELECTRIC RECEPTICLE AVAILABLE

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * .125 ALUMINUM NON-ANODIZED
- * OPTION 12 GA. STEEL
 - + POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
 - + FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL

LOAD

21

FRONT

MOUNTING PLAN

STANDARD PEDESTAL OF

OVERLAND PARK, KANSAS

+ FOREST GREEN COLOR STANDARD CUSTOM COLORS AVAILABLE

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE