




USP16- MODEL SERIES



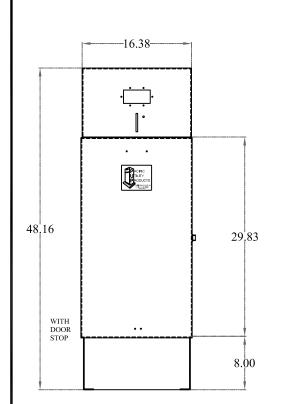




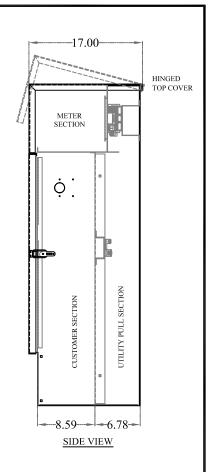

FRONT VIEW

FRONT VIEW SHOWN LESS DOOR & COVERS



PLAN VIEW

STANDARD PEDESTAL OF KANSAS CITY, MISSOURI

SINGLE METER SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE PARKING LOT LIGHTING, HIGHWAY STREET AND SIGN LIGHTING AND TRAFFIC SIGNAL CIRCUITS.

STANDARD FEATURES

METER SOCKET 5TH CLIP JAW ASSY STANDARD VOLTAGE 120 / 240VAC 1-PHASE 3-WIRE LIGHTING ARRESTER AVAILABLE 650VAC 30A/3P LIGHTING CONTACTOR (SIEMENS TYPE 'LE'), 60A CLASS 'J' FUSE, AND TERMINAL BLOCK FOR EACH LIGHTING CIRCUIT AS REQUIRED DOOR STOP TO PREVENT CUSTOMER DOOR SWINGING CLOSED PHOTOELECTRIC SOCKET

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- * OPTION 0.125 ALUMINUM NON-ANODIZED

- * FORREST GREEN COLOR STANDARD CUSTOM COLORS AVAILABLE
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE